

## SPECIFICATIONS

Product name		WaterMark Cetificated Smart Toilet	
Product model		G6FD-E	G1FD-E
Lid/Seat open and close		Auto	Auto
Product configuration		Rear clean,front clean,foot sensing flushing, power saving mode, dryer, dryer, night light	
Rated voltage		AC 220V-240V	
Rated frequency		50Hz/60Hz	
Rated power		1250W	
Power cord length		About 5ft	
Certified T-valve		T-valve, inlet water supply and dual outlets for 2 hoses	
Inlet Hose		WaterMark Certified Inlet Hose, 60cm in length	
Water Inlet	Minimum Pressure	0.07MPa (dynamic)	
	Maximum pressure	0.80MPa	
Toilet	Nominal water consumption	3L-4.6L per flush	
	Flush method	Washdown tornado flush	
	Rough-in	Optional	
Cleaning	Water outlet hip cleaning	About 650 ml/min	
	Heating type	About 650 ml/min	
	Heater power	Instant water heater	
	Cleaning water temperature	Water inlet temperature:15°C, water outlet temperature:40°C, Water discharge: 650ml/min, power:1250W	
	Position adjustment	4-level adjustment	
	Washing temp range	Normal temperature, and 35°C/37°C/40°C (4 grades)	
	Mobile Cleaning	The spray head can move 1.5cm forward and backward	
	Water pressure adjustment	Minimum essential water pressure 0.06mpa, maximum water pressure 0.6mpa (at rest)	
Seat Heating	Safety device	Water temperature sensor, temperature blocking filament, thermostat, thermal fuse,temperature, leakage protector	
	Seat temperature	Normal temperature, and 35°C/37°C/39°C (4 grades)	
	Heater power	40W	
Warm Drying	Safety device	Temperature blocking filament, thermostat, thermal fuse, temperature sensor, leakage protector	
	Wind temperature	More than 30°C, less than 55°C(3 grades)	
	Air flow	> 0.2m³/min	
	Safety device	Thermal fuse, bimetal thermostat, leakage protector	
Sensor for open/close seat cover		Radar	
Classification of waterproof		IPX4	
Ambient temperature		0-40°C	
Product size(include cover)		705x390x440mm	705x390x460mm
Bacteriostat parts		Toilet seat, nozzle	
Color		White	

Due to the different printing time of the materials, the product specifications may be slightly changed. Please refer to the material object.



Guangdong Gose Kitchen and Bathroom Ware Co., Ltd

Mobile: +86 13670498912

Email: emma.lu@gosewc.com

Web: www.gosewc.com

Add: No. 9 Lincuo Yuan Industrial Area, Fuqing Village, Guxiang Town, Chao'an District, Chaozhou City, Guangdong Province, China



Official Accounts

Wechat

Whatapp



## G1FD-E Intelligent Toilet

Size: 705x390x460mm  
 Rating: AC 220V-240V  
 4.6L/3L Dual Flush  
 Washdown Tornado Flush

Trap: 110-255mm (Supplied)  
 Waterproof: IPX4  
 Heating Mode: Instant Heating


Trap: 60-190mm (Optional)  
 Trap: 150-280mm (Optional)  
 P-trap: 180mm

Certification



CE-EMC CE-LVD CE-RED EN997

Dimension drawing (size:mm)

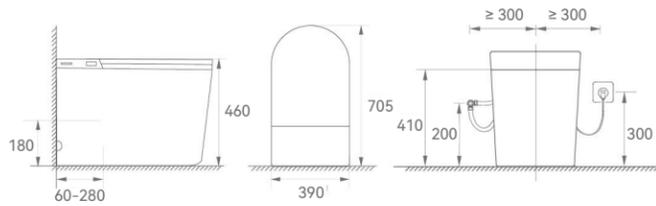

### Basic Functions

Heated seat  
 Female/Rear wash  
 Warm air drying  
 Auto flush  
 Auto open lid  
 Foot sense open seat  
 Power-off flush  
 Foot sense flush  
 Remote control  
 Knob/Button control  
 Water Proof IPX4  
 Tank in-built  
 Night light  
 Ambient Light  
 LED display screen  
 Mobile wash  
 Nozzle Position  
 Relive Constipation Wash  
 Self-cleaning

### Specific Functions

Detachable Spray Nozzle  
 Doorbell Remote Control  
 SIAA anti-bacterial seat  
 Automatic seat warming  
 Smart full/half flush  
 Quiet flush  
 Air gap water backflow prevention

### Adjustable Function

Water temp adjustable  
 Dyer air temp adjustable  
 Seat temp adjustable  
 Water pressure adjustable



## G6FD-E Intelligent Toilet

Size: 705x390x440mm  
 Rating: AC 220V-240V  
 4.6L/3L Dual Flush  
 Washdown Tornado Flush

Trap: 110-255mm (Supplied)  
 Waterproof: IPX4  
 Heating Mode: Instant Heating


Trap: 60-190mm (Optional)  
 Trap: 150-280mm (Optional)  
 P-trap: 180mm

Certification



CE-EMC CE-LVD CE-RED EN997

Dimension drawing (size:mm)

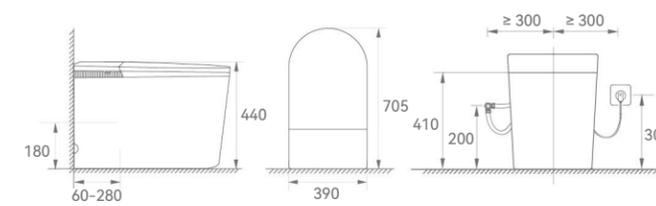

### Basic Functions

Heated seat  
 Female/Rear wash  
 Warm air drying  
 Auto flush  
 Auto open lid  
 Foot sense open seat  
 Power-off flush  
 Foot sense flush  
 Remote control  
 Button control  
 Water Proof IPX4  
 Tank in-built  
 Night light  
 Ambient Light  
 LED display screen  
 Mobile wash  
 Nozzle Position  
 Relive Constipation Wash  
 Self-cleaning

### Specific Functions

Detachable Spray Nozzle  
 Doorbell Remote Control  
 SIAA anti-bacterial seat  
 Automatic seat warming  
 Smart full/half flush  
 Quiet flush  
 Air gap water backflow prevention

### Adjustable Function

Water temp adjustable  
 Dyer air temp adjustable  
 Seat temp adjustable  
 Water pressure adjustable



### Seasonal temperature sensation

Automatic adjustment of the seat/water air drying temperature according to the bathroom temperature




### Detachable nozzle

The nozzle is detachable, making it easier to remove, replace and clean in your daily life.



### Tech-sense Ambient Light

Add a touch of romance. Make the atmosphere perfect




### Air Gap & Back-flow Prevent

These design make smart toilet suitable both new and old houses in Australia, also will not pollute the water source.



### Automatic sensing

When you approach to the toilet, the cover will open automatically. When you leave, it will flush automatically and close the cover softly.



### Say Goodbye To Traditional Inner Wall

New design inner wall, easy to clean, no dirt residue.



### Intelligent Dual Remote Control

Equipped with remote control and door bell ring control, every need is conveniently at your fingertips.



### Foot touch sensing

Foot touch open the seat ring for men use, resist urine splashing. Antibacterial and splash proof. no need to bend over, free hands